


Gas Cylinder Trolley

CTS01

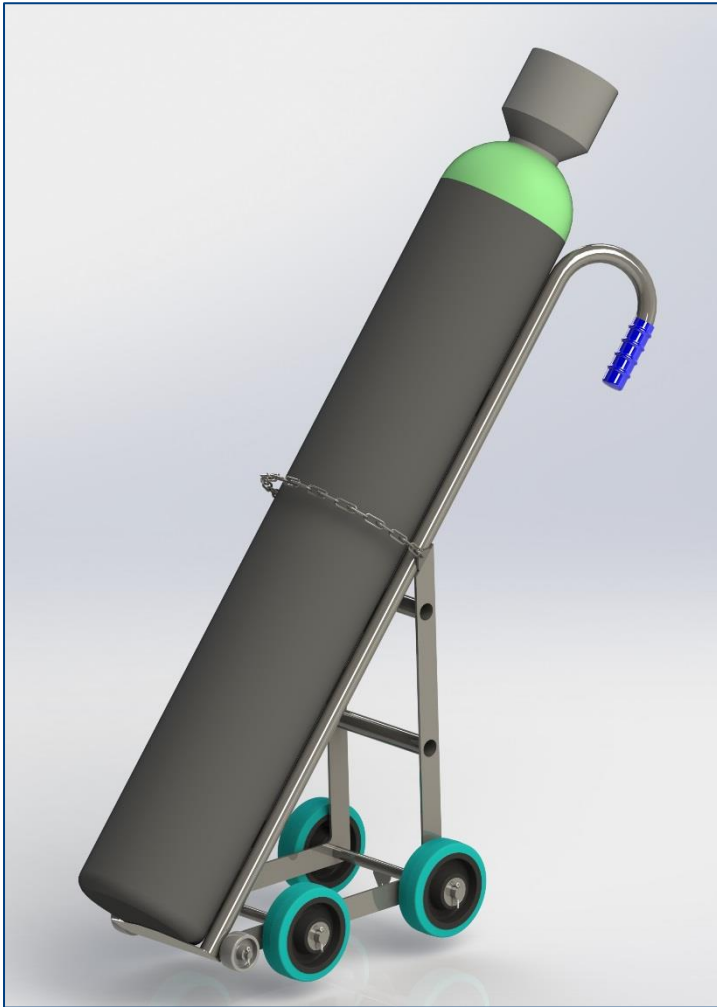

Technical specification:

- safe working load (SWL) 150kg;
- trolley weight 15kg;
- max cylinder height 1600mm ;
- cylinder diameter range 190-250mm;
- overall trolley length 1040mm;
- overall trolley width 380mm;
- 160mm diameter wheels with precision sealed bearings;
- maximum operator input force 15kg;
- clean AISI 304 stainless steel construction;
- for use on smooth level floors;
- simple one person operation;
- negotiates single steps and lips within relevant handling regulations;
- complies with EC Machinery Directive 2006/42/EC;
- CE marked;
- packaged dimensions – assembled - 1000mm x 600mm x 1200mm (width x depth x height).

Unit options:


- ATEX option available;
- overhead lift model available (CTS02).



The CTS01 is a pedestrian cylinder trolley which is designed to allow the operator to transport gas cylinders and canisters safely. The CTS01 is operated from the rear of the unit and slips under the front edge of the cylinder, the operator then pulls the trolley and cylinder back onto all four wheels and secures the safety chain around the cylinder for transportation. If the operator needs to climb a kerb with the trolley they simply push back on the handles to raise the front wheels. If you require an ATEX certified unit for a hazardous area please consider our ATEX rated cylinder trolley; the CTS01-EX.



Bespoke
Handling
Equipment

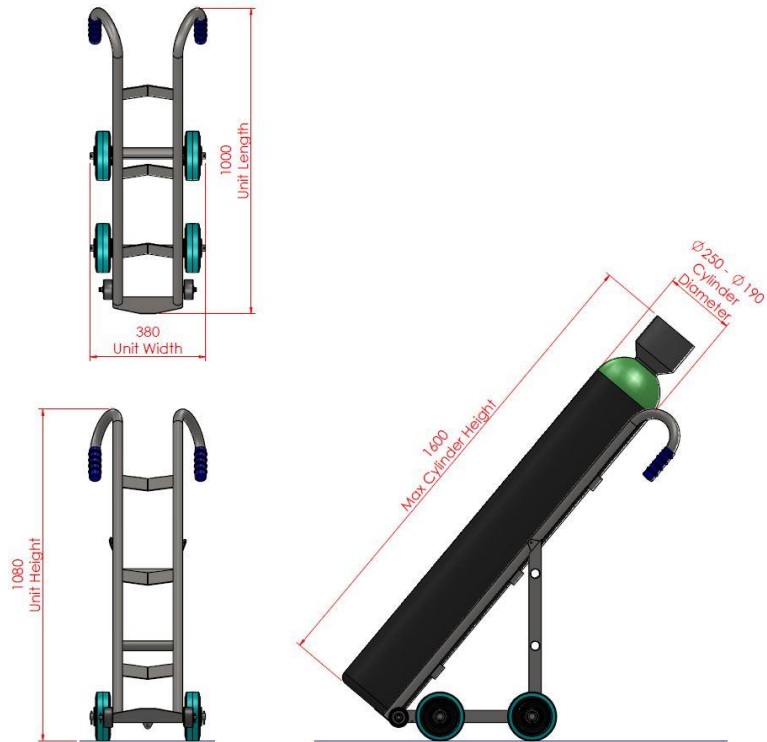

UK
Manufacture

BESPOKE HANDLING EQUIPMENT LTD (T.A. STS)
Praze Rd Leedstown, Hayle, Cornwall, TR27 6DS
Tel: 01736 851050 Fax: 01736 851023
Website: www.sts-trolleys.co.uk
Email: sales@sts-trolleys.co.uk

