


Gas Cylinder Trolley with Overhead Lifting Hoist

CTS02

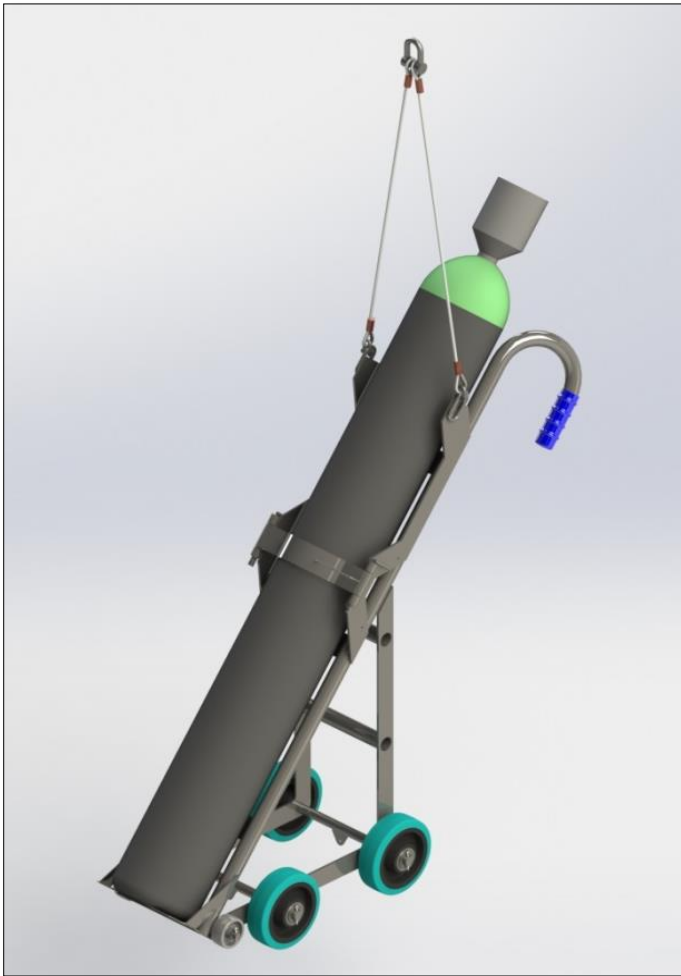

Technical specification:

- safe working load (SWL) 150kg;
- trolley weight 20kg;
- maximum cylinder height 1600mm;
- cylinder diameter range 190-250mm;
- overall trolley length 1000mm;
- overall trolley width 380mm;
- 160mm diameter wheels with precision sealed bearings;
- certificated 4mm lifting wires;
- secure fixed band clamp system;
- maximum operator input force 15kg;
- clean AISI 304 stainless steel construction;
- for use on smooth level floors;
- simple one person operation;
- negotiates single steps and lips within relevant handling regulations;
- complies with EC Machinery Directive 2006/42/EC;
- CE marked;
- packaged dimensions – assembled - 1000mm x 600mm x 1200mm (width x depth x height).



Unit options:


- ATEX option available.

The CTS02 is a gas cylinder trolley with a fixed clamping band and certified lifting hoist, this modified version of the CTS01 has been developed to satisfy the need for lifting cylinders with a crane or hoist.

The CTS02 is operated from the rear of the unit and slips under the front edge of the cylinder, the operator then pulls the trolley and cylinder back onto all four wheels, the cylinder is locked into the trolley with a secure clamp band system. If you require an ATEX certified unit for a hazardous area please consider our ATEX rated gas cylinder trolley; the CTS02-EX.



Bespoke
Handling
Equipment

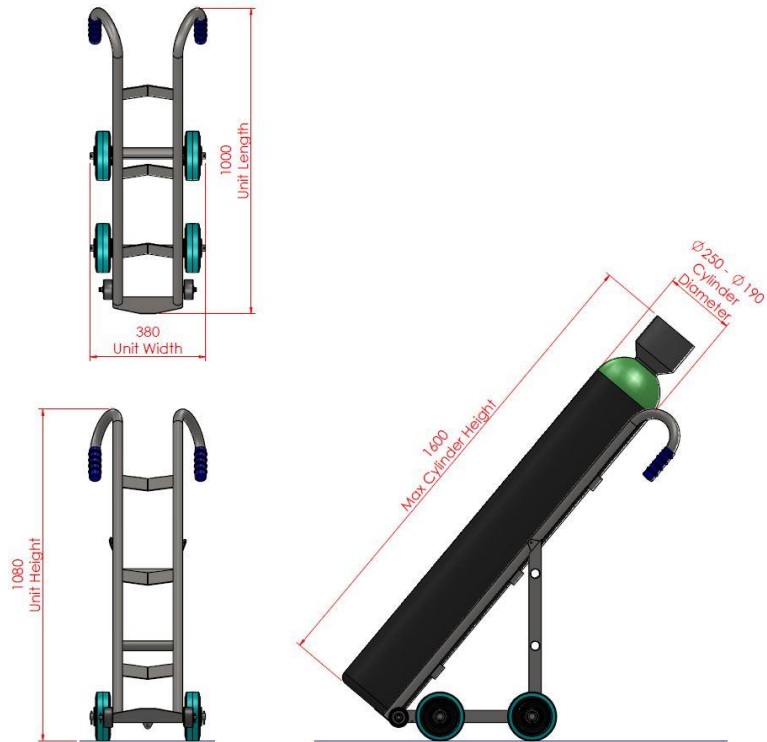

UK
Manufacture

BESPOKE HANDLING EQUIPMENT LTD (T.A. STS)
Praze Rd Leedstown, Hayle, Cornwall, TR27 6DS
Tel: 01736 851050 Fax: 01736 851023
Website: www.sts-trolleys.co.uk
Email: sales@sts-trolleys.co.uk

