

## Universal Drum Trolley

DTC01



### Technical specification:

- safe working load (SWL) 350kg;
- unit weight 28kg;
- height 1320mm;
- width 795mm;
- maximum operational length 1260mm;
- maximum operator input force 20kg;
- operational handle height 915mm;
- clearance under the drum 75mm;
- clean AISI 304 stainless steel construction;
- 250mm wheels chemical resistant wheels;
- for use on smooth level floors;
- complies with EC Machinery Directive 2006/42/EC;
- CE marked;
- shipping dimensions on pallet (W x D x H):
  - assembled – 600 x 1000 x 1470
  - unassembled – 1200 x 800 x 480.

### Unit options:

- ATEX option available.




The Universal Drum Trolley is built to suit many different types of drums and barrels. It uses an innovative adjustable drum catch.

The DTC01 is a universal pedestrian drum trolley which is designed to lift and move a variety of drums. The DTC01 is operated from the rear of the unit and attaches to the top lip of the drum via an adjustable drum catch.

If you require an ATEX certified unit for a hazardous area consider our ATEX rated Universal Drum Trolley; the

DTC01-Ex.

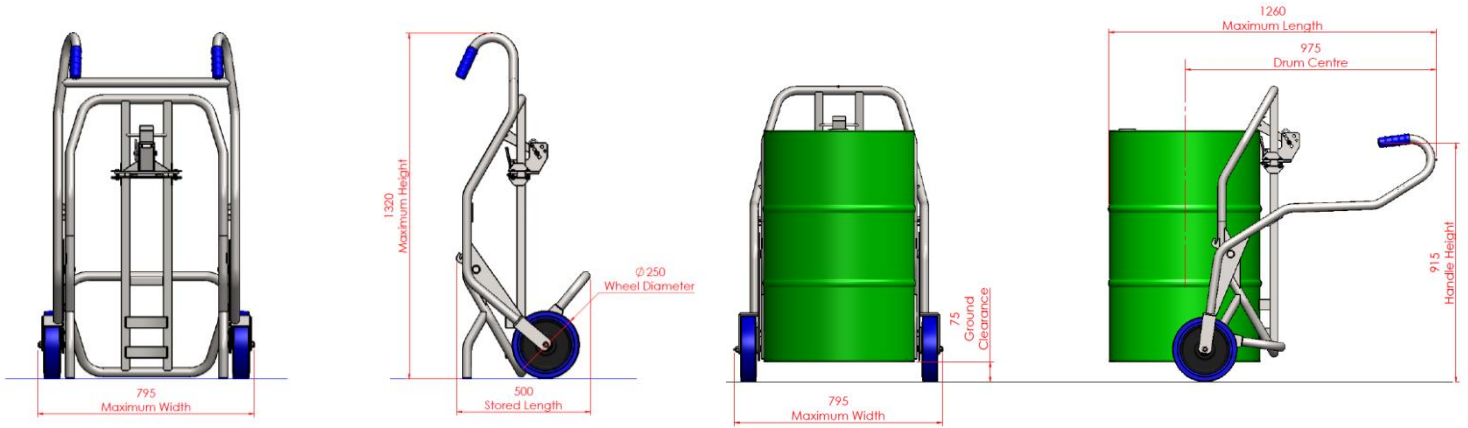

Below are images of the easy procedure of operating the DTC01 to lift and manoeuvre a 200-litre drums.



UK  
Manufacture

BESPOKE HANDLING EQUIPMENT LTD (T.A. STS)  
 Praze Rd Leedstown, Hayle, Cornwall, TR27 6DS  
 Tel: 01736 851050 Fax: 01736 851023  
 Website: [www.sts-trolleys.co.uk](http://www.sts-trolleys.co.uk)  
 Email: [sales@sts-trolleys.co.uk](mailto:sales@sts-trolleys.co.uk)

