

47kg LPG Gas Cylinder Trolley

CTS03





Technical specification:

- safe working load (SWL) 125kg;
- trolley weight 22kg;
- max cylinder height 1500mm ;
- cylinder diameter range 300-450mm;
- overall trolley length 1000mm;
- overall trolley width 520mm;
- 160mm diameter front wheels with precision sealed bearings;
- 260mm diameter pneumatic rear wheels with precision bearings;
- maximum operator input force 10kg;
- clean AISI 304 stainless steel construction;
- for use on a variety of floor types;
- simple one person operation;
- negotiates single steps and lips within manual handling guidance;
- complies with EC Machinery Directive 2006/42/EC;
- CE marked;
- packaged dimensions – assembled - 1000mm x 600mm x 1200mm (width x depth x height).

The CTS03 is an LPG gas bottle trolley which is designed to allow the operator to transport an LPG cylinder weighing up to 125kg safely. The CTS03 is operated from the rear of the unit and slips under the front edge of the cylinder, the operator then pulls the trolley and cylinder back onto all four wheels and secures the safety chain around the cylinder for transportation. If the operator needs to climb a kerb with the trolley they simply push back on the handles to raise the front wheels. Pneumatic tyres are fitted at the rear for easier use over uneven ground.



Bespoke
Handling
Equipment

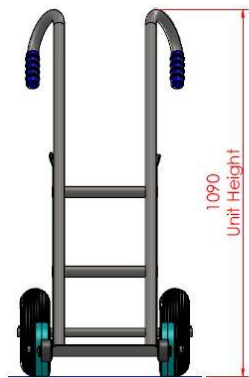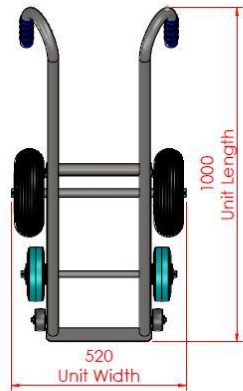

UK
Manufacture

BESPOKE HANDLING EQUIPMENT LTD (T.A. STS)
Praze Rd Leedstown, Hayle, Cornwall, TR27 6DS
Tel: 01736 851050 Fax: 01736 851023
Website: www.sts-trolleys.co.uk
Email: sales@sts-trolleys.co.uk

